

GPS Tracker Model W1



W1 is designed for electric bike and motorcycle users, the product size is small, the performance is more stable, wide voltage design is suitable for electric bike and motorcycle, equipped with Velcro fixed more stable.

The products should be used for electric bikes and motorcycles users anti-theft positioning, traffic police patrol law enforcement assistance and crime solving, intelligent transportation and other fields.

We provide free platform for the buyers, they can check the situation via our platform in mobile phone and computer.

Functions:

- Real time tracking
- Track playback
- Vibration alarm
- Mileage statistics
- Polygon Geo-fence alarm
- Date statistics

Installation instructions:

1.Installing SIM card and battery

Open SIM card cover, insert SIM card into SIM socket and lock SIM socket. Install the included battery and restore the battery cover.

2.Installing tracker into vehicle

The tracker is suggested to be installed by professional mechanics authorized by dealer with following notices:


- 2.1 To avoid human destruction, the tracker should be concealed installation.
- 2.2 Avoid installation near the emission source, such as reversing radar, and other automobile communication equipment.
- 2.3 Avoid high temperature, high humidity environment.
- 2.4 To ensure the result of vibration detection, tracker should be fixed by Velcro tapes.
- 2.5 Make sure the up side of the tracker to face to sky without any metal covering it.

3.Installing power cable

3.1 The appropriate input power voltage range is 9V-30V, the red line represents for positive power supply and the black line represents for the negative power supply.

3.2 Please choose a separate ground for the negative pole of the power supply, and do not connect it with other ground wires.

4. ACC Detection Wiring Method

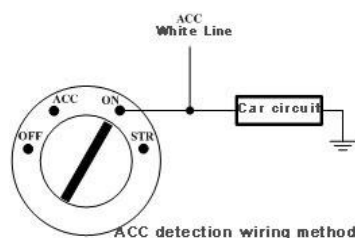

Specifications:

Chip sets	U-BLOX	Sensitivity	<-161dBm
TTF	Cold Start 35s, Hot Start 2s	Fix Accuracy	10m
Speed Accuracy	0.3m/s	GSM frequency band	GSM 850/900/1800/1900M
Maximum Transmission Power	1W	Dimension	78mm*52mm*20mm
Operating Voltage	9V ~ 30V	Maximum Operating Current	< 800mA(12V)
Standard Operating Current	< 10mA(12V)	Operating Temperature	-20 °C ~ +70 °C
Humidity	20% ~ 95%		

Accessories:

W1 Tracker	Cable	User manual	Velcro	Battery	Waterproof casing
------------	-------	-------------	--------	---------	-------------------